

#### Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2-1/2	2.50	63.5	28.00	711.2	2.25	3.34
3-1/4	3.25	82.6	28.00	711.2	2.31	3.43

#### Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max				
				dry	wet		dry	wet			
AS	Anti-Static	Carbon Steel	0	+180	NR	-18	+82	NR	2,390	10,631	-
ESD	Electrostatic Dissipative	Carbon Steel	0	+180	NR	-18	+82	NR	2,390	10,631	-
FR	Flame Retardant	Carbon Steel	0	+180	NR	-18	+82	NR	2,390	10,631	-
HP™	High Performance	Carbon Steel	-40	+180	NR	-40	+82	NR	2,390	10,631	-
WHP	White High Performance	Carbon Steel	-40	+180	NR	-40	+82	NR	2,390	10,631	-
HS	Heat Stabilized	Carbon Steel	-40	+220	NR	-40	+104	NR	2,390	10,631	-
LF	Low Friction	Carbon Steel	-40	+180	NR	-40	+82	NR	2,390	10,631	-
WLF	White Low Friction	Carbon Steel	-40	+180	NR	-40	+82	NR	2,390	10,631	-
MR	Melt Resistant	Carbon Steel	-80	+220	NR	-62	+104	NR	2,390	10,631	-
P	Chemical Resistant	Carbon Steel	0	+180	NR	-18	+82	NR	2,390	10,631	-
DUV	Ultraviolet Resistant	Carbon Steel	0	+180	NR	-18	+82	NR	2,390	10,631	-
BWR	Black Wear Resistant	Carbon Steel	-40	+180	NR	-40	+82	NR	2,390	10,631	-


Standard materials are highlighted. All other materials are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended.

#### Regulatory Information

Rexnord, Rex, TableTop and HP are trademarks of Rexnord Corporation. All rights reserved.

- #### Additional Notes
1. Stocked in 120 pitch, 10 ft (3.048 m) length strands.
  2. Uses 1883 carbon steel (S) base chain (Part #614-106-1).
  3. Chain runs on ANSI No. 80 sprockets.

**Corner Track (Two Piece)**

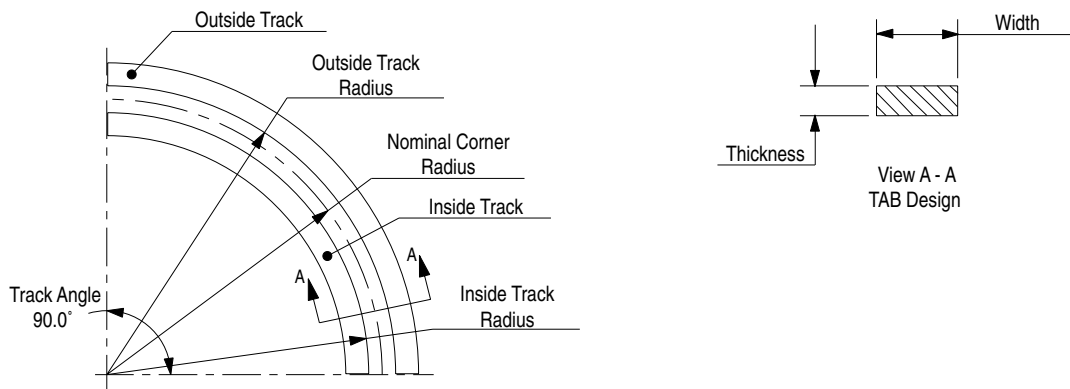

Corner track number supplied as one 90° inside and one 90° outside track, which can be used as either carry or return.

Corner Track Number	Accommodates Top Plate Width		Nominal Corner Radius		Inside Track Radius		Outside Track Radius		Thickness		Width		Material	Color	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			lbs	kg
<b>TAB Design</b>																
N30R7	All	All	30.0	762	29.1	739	30.9	785	0.9	22	1.5	38	Nylatron®	Black	5.10	2.31
U28R7	All	All	28.0	711	27.1	688	28.9	734	0.9	22	1.5	38	UHMWPE	White	4.76	2.16
U30R7	All	All	30.0	762	29.1	739	30.9	785	0.9	22	1.5	38	UHMWPE	White	5.10	2.31
U36R7	All	All	36.0	914	35.1	892	36.9	937	0.9	22	1.5	38	UHMWPE	White	6.11	2.77

Nylatron is a registered trademark of Polymer Corporation.