




Chain is shown with Low Friction (LF) top plates on Stainless Steel (SS) base chain.

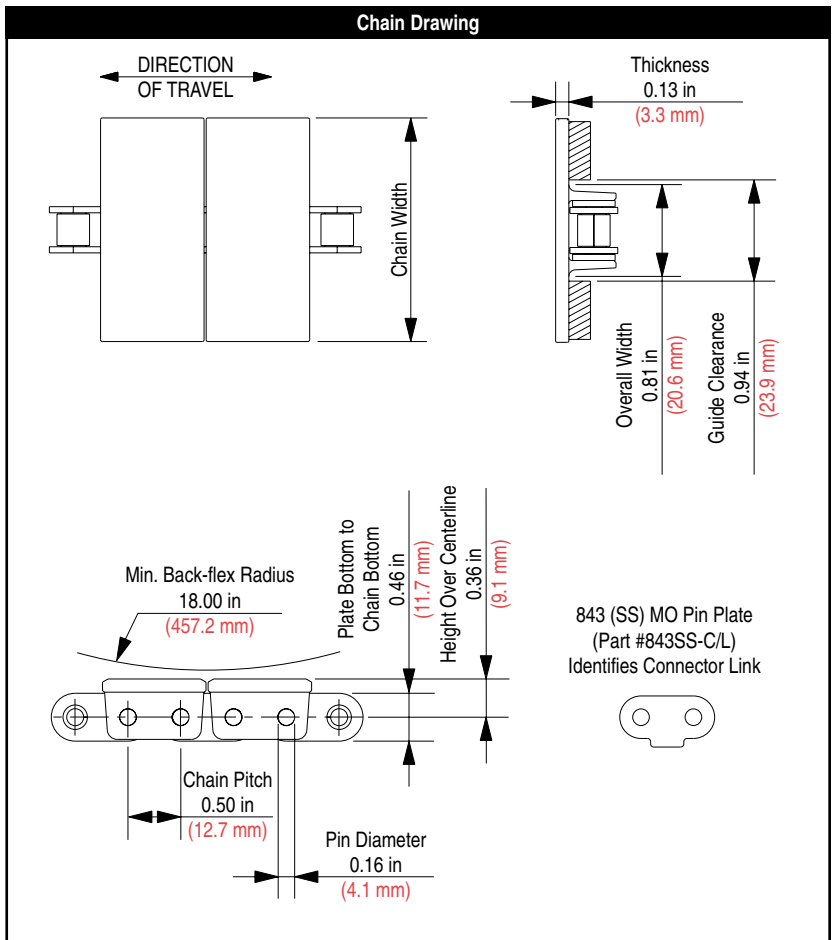

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1-1/8	1.13	28.6	-	-	0.57	0.85
1-3/8	1.38	34.9	-	-	0.60	0.89
2	2.00	50.8	-	-	0.66	0.99

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
AS	Anti-Static	Stainless Steel	0	+180	+150	-18	+82	+66	520	2,313	-
CR	Extreme Chemical Resistant	Stainless Steel	+40	+250	+212	+4	+121	+100	520	2,313	✓
D	Plain Acetal	Stainless Steel	-40	+180	+150	-40	+82	+66	520	2,313	✓
ESD	Electrostatic Dissipative	Stainless Steel	0	+180	+180	-18	+82	+82	520	2,313	-
FR	Flame Retardant	Stainless Steel	0	+180	+140	-18	+82	+60	520	2,313	-
HP™	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	520	2,313	✓
WHP	White High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	520	2,313	✓
LF	Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	520	2,313	✓
WLF	White Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	520	2,313	✓
MR	Melt Resistant	Stainless Steel	-80	+220	NR	-62	+104	NR	520	2,313	-
P	Chemical Resistant	Stainless Steel	0	+180	+140	-18	+82	+60	520	2,313	✓
DUV	Ultraviolet Resistant	Stainless Steel	0	+180	+150	-18	+82	+66	520	2,313	-
BWR	Black Wear Resistant	Stainless Steel	-40	+180	NR	-40	+82	NR	520	2,313	-

Standard materials are highlighted. All other materials are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended.

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.


Rexnord, Rex, TableTop and HP are trademarks of Rexnord Corporation. All rights reserved.

- ### Additional Notes
1. Stocked in 240 pitch, 10 ft (3.048 m) length strands.
 2. Uses 843 stainless steel (SS) base chain (Part #843SS-BC).
 3. Chain runs on ANSI No. 40 sprockets.



Chain is shown with Low Friction (LF) top plates on Carbon Steel (S) base chain.

Chain Information						
Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
1-1/8	1.13	28.6	-	-	0.57	0.85
1-3/8	1.38	34.9	-	-	0.60	0.89
2	2.00	50.8	-	-	0.66	0.99

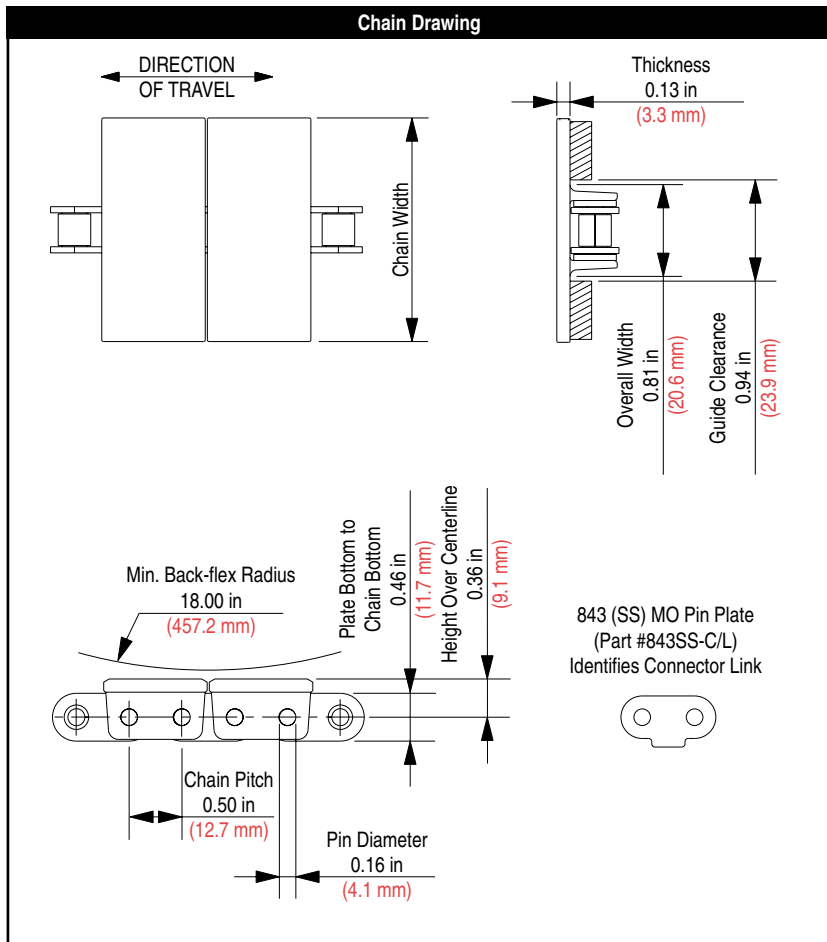

Available Materials												
Prefix	Top Plate Material	Base Chain Material	Temperature							Chain Strength		FDA Approval
			Fahrenheit			Celsius						
			min	max		min	max					
				dry	wet		dry	wet	wet			
AS	Anti-Static	Carbon Steel	0	+180	NR	-18	+82	NR	800	3,558	-	
CR	Extreme Chemical Resistant	Carbon Steel	+40	+250	NR	+4	+121	NR	800	3,558	-	
D	Plain Acetal	Carbon Steel	-40	+180	NR	-40	+82	NR	800	3,558	-	
ESD	Electrostatic Dissipative	Carbon Steel	0	+180	NR	-18	+82	NR	800	3,558	-	
FR	Flame Retardant	Carbon Steel	0	+180	NR	-18	+82	NR	800	3,558	-	
HP™	High Performance	Carbon Steel	-40	+180	NR	-40	+82	NR	800	3,558	-	
WHP	White High Performance	Carbon Steel	-40	+180	NR	-40	+82	NR	800	3,558	-	
LF	Low Friction	Carbon Steel	-40	+180	NR	-40	+82	NR	800	3,558	-	
WLF	White Low Friction	Carbon Steel	-40	+180	NR	-40	+82	NR	800	3,558	-	
MR	Melt Resistant	Carbon Steel	-80	+220	NR	-62	+104	NR	800	3,558	-	
P	Chemical Resistant	Carbon Steel	0	+180	NR	-18	+82	NR	800	3,558	-	
DUV	Ultraviolet Resistant	Carbon Steel	0	+180	NR	-18	+82	NR	800	3,558	-	
BWR	Black Wear Resistant	Carbon Steel	-40	+180	NR	-40	+82	NR	800	3,558	-	

Standard materials are highlighted. All other materials are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended.

Regulatory Information

Rexnord, Rex, TableTop and HP are trademarks of Rexnord Corporation. All rights reserved.

- Additional Notes**
1. Stocked in 240 pitch, 10 ft (3.048 m) length strands.
 2. Uses 843 carbon steel (S) base chain (Part #843-BC).
 3. Chain runs on ANSI No. 40 sprockets.