




Chain is shown in Low Friction (LF) material.

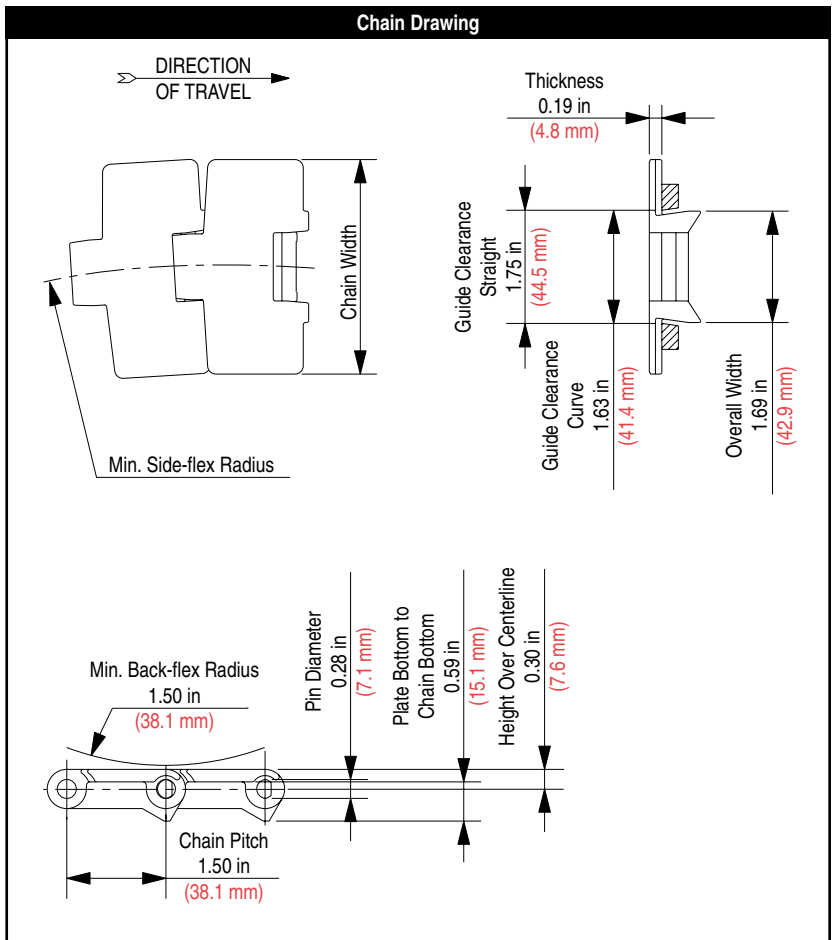

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3-1/4	3.25	82.6	18.00	457.2	0.60	0.89
4-1/2	4.50	114.3	24.00	609.6	0.70	1.04

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
AS	Anti-Static	Stainless Steel	0	+180	+150	-18	+82	+66	255	1,134	-
D	Plain Acetal	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓
WD	White Plain Acetal	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓
FR	Flame Retardant	Stainless Steel	0	+180	+140	-18	+82	+60	255	1,134	-
HP™	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓
WHP	White High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓
LF	Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓
WLF	White Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓
MR	Melt Resistant	Stainless Steel	-80	+220	NR	-62	+104	NR	425	1,890	-
P	Chemical Resistant	Stainless Steel	0	+180	+140	-18	+82	+60	340	1,512	✓
DUV	Ultraviolet Resistant	Stainless Steel	0	+180	+150	-18	+82	+66	425	1,890	-
BWR	Black Wear Resistant	Stainless Steel	-40	+180	NR	-40	+82	NR	510	2,268	-

Standard materials are highlighted. All other materials are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended.

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, Rex, TableTop and HP are trademarks of Rexnord Corporation. All rights reserved.


Additional Notes

1. Stocked in 80 pitch, 10 ft (3.048 m) length strands.
2. Thermoplastic pins are available on a made-to-order basis.



Chain is shown in Low Friction (LF) material.

Chain Information						
Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
3-1/4	3.25	82.6	18.00	457.2	0.70	1.04
4-1/2	4.50	114.3	24.00	609.6	0.76	1.13


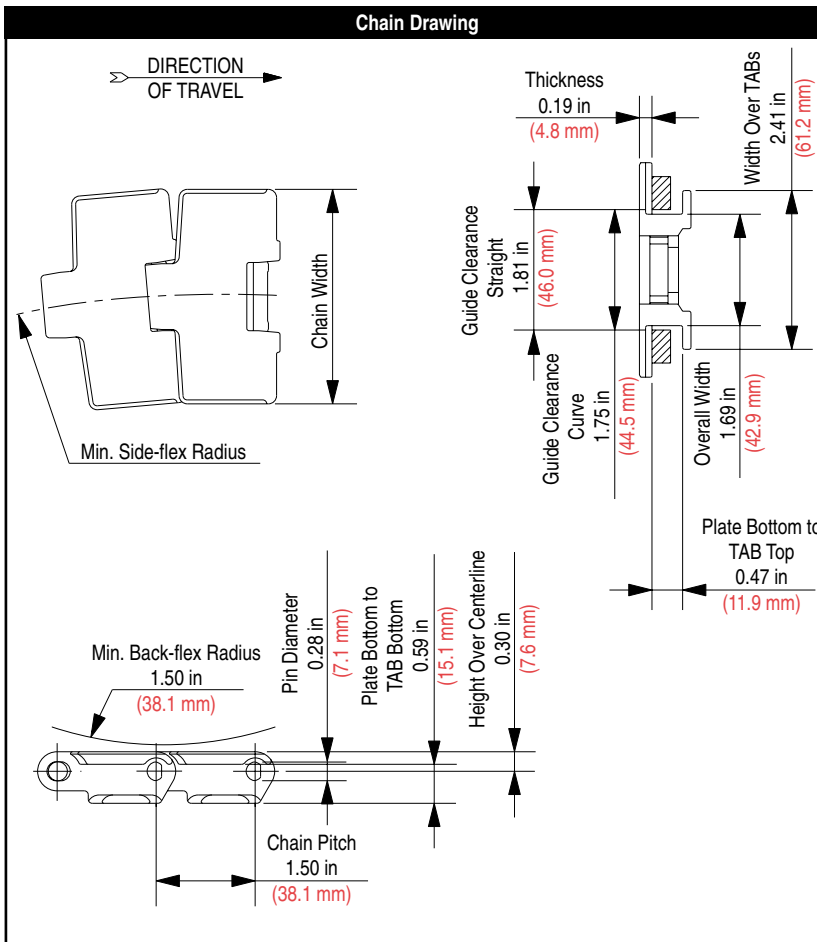


Available Materials												
Prefix	Chain Material	Standard Pin Material	Temperature							Chain Strength		FDA Approval
			Fahrenheit			Celsius						
			min	max		min	max					
				dry	wet		dry	wet	dry	wet		
AS	Anti-Static	Stainless Steel	0	+180	+150	-18	+82	+66	255	1,134	-	
D	Plain Acetal	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓	
WD	White Plain Acetal	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓	
FR	Flame Retardant	Stainless Steel	0	+180	+140	-18	+82	+60	255	1,134	-	
HP™	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓	
WHP	White High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓	
LF	Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓	
WLF	White Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	425	1,890	✓	
MR	Melt Resistant	Stainless Steel	-80	+220	NR	-62	+104	NR	425	1,890	-	
P	Chemical Resistant	Stainless Steel	0	+180	+140	-18	+82	+60	340	1,512	✓	
DUV	Ultraviolet Resistant	Stainless Steel	0	+180	+150	-18	+82	+66	425	1,890	-	
BWR	Black Wear Resistant	Stainless Steel	-40	+180	NR	-40	+82	NR	510	2,268	-	

Standard materials are highlighted. All other materials are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended.

Regulatory Information
<p>The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.</p> <p>Rexnord, Rex, TableTop and HP are trademarks of Rexnord Corporation. All rights reserved.</p>

Additional Notes
<ol style="list-style-type: none"> 1. Stocked in 80 pitch, 10 ft (3.048 m) length strands. 2. Thermoplastic pins are available on a made-to-order basis.

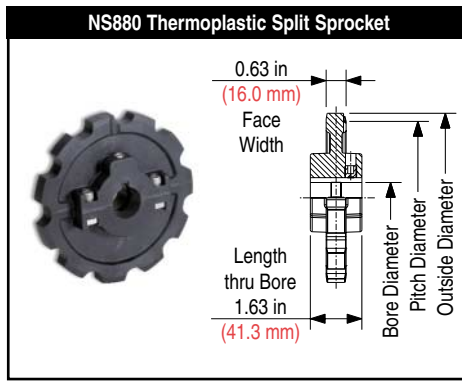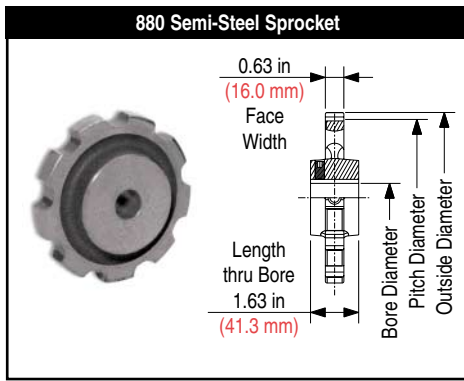


880 Semi-Steel Sprocket Information																			
Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	in	mm	in	mm	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	4.386	111.40	4.33	110.0	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	2.87	1.30
10	10	4.854	123.29	4.82	122.4	3/4	1-1/4	20	30	-	-	-	-	3/4	1-3/4	20	40	3.09	1.40
11	11	5.324	135.23	5.31	134.9	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	3.31	1.50
12	12	5.796	147.22	5.80	147.3	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	3.53	1.60
15	15	7.215	183.26	7.26	184.4	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	4.19	1.90

Shaft-ready round bores are shipped with keyway and setscrews. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews.

NS880 Thermoplastic Split Sprocket Information																			
Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	in	mm	in	mm	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.324	135.23	5.30	134.6	1	1-5/8	25	40	-	-	-	-	1	1-3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.80	147.3	1	1-3/4	25	45	-	-	-	-	1	1-3/4	25	45	0.82	0.37

Shaft-ready round bores are shipped with keyway and setscrews. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

Corner Track (One Piece)

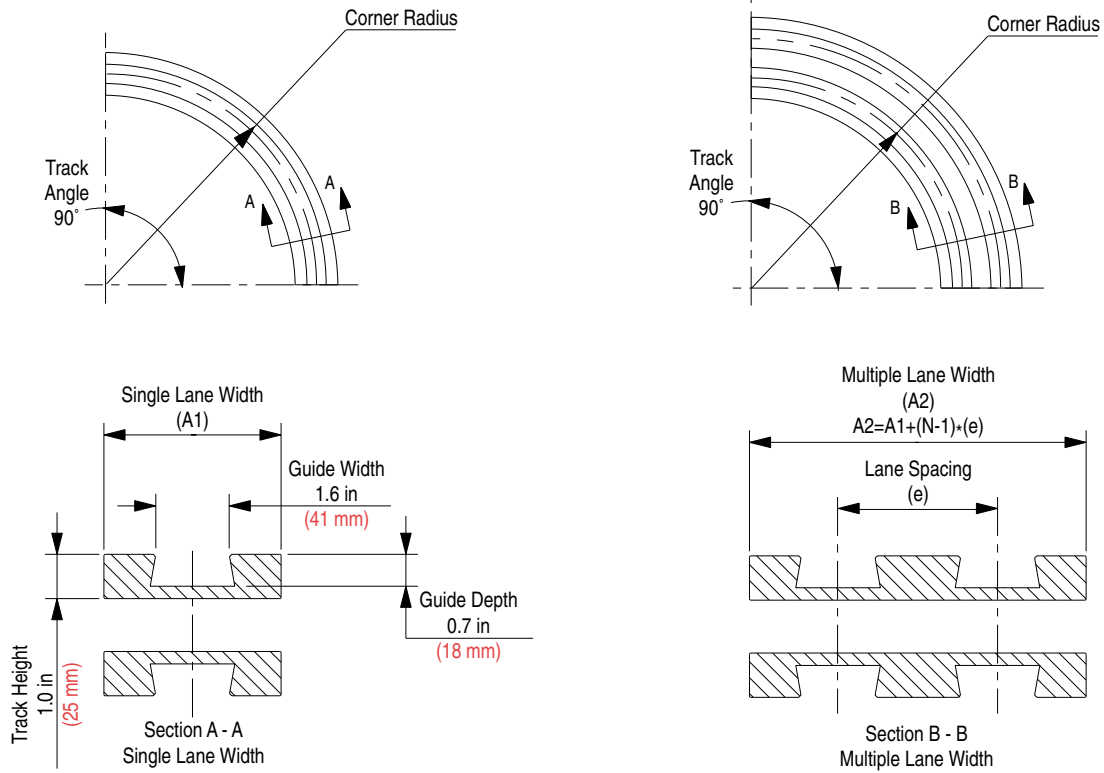


Corner track number supplied as one 90° inside and one 90° outside track, which can be used as either carry or return.

All one piece corner tracks are available on a made-to-order basis.

For 879 (bevel) chain only. Do not use with 879 TAB chains.

Corner Track Number	Chain Width		Corner Radius		Single Lane Width (A1)		Multiple Lane Width (A2)		Lane Spacing (e)		Material	Color	Number of Lanes (N)	Approximate Weight			
	in	mm	in	mm	in	mm	in	mm	in	mm				lbs	kg		
KSU013457-1	3-1/4	82.6	18.0	457	3.9	100	-	-	3.5	90	UHMWPE	Black	1	9.15	4.15		
KSU013457-2							7.5	190					2	17.37	7.88		
KSU013457-3			11.0	280			3	25.59					11.61				
KSU013457-4			14.6	370			4	33.84					15.35				
KSU013610-1	24.0	610	-	-	-	-	-	-	-	-			-	-	1	12.20	5.53
KSU013610-2							7.5	190							2	23.16	10.51
KSU013610-3							11.0	280							3	34.12	15.48
KSU013610-4							14.6	370							4	45.12	20.47
KSU018610-1	4-1/2	114.3	24.0	610	4.9	125	-	-	4.7	120	-	-	1	14.93	6.77		
KSU018610-2							9.6	245					2	29.85	13.54		
KSU018610-3							14.4	365					3	44.47	20.17		
KSU018610-4							19.1	485					4	59.11	26.81		

Corner Track (One Piece)

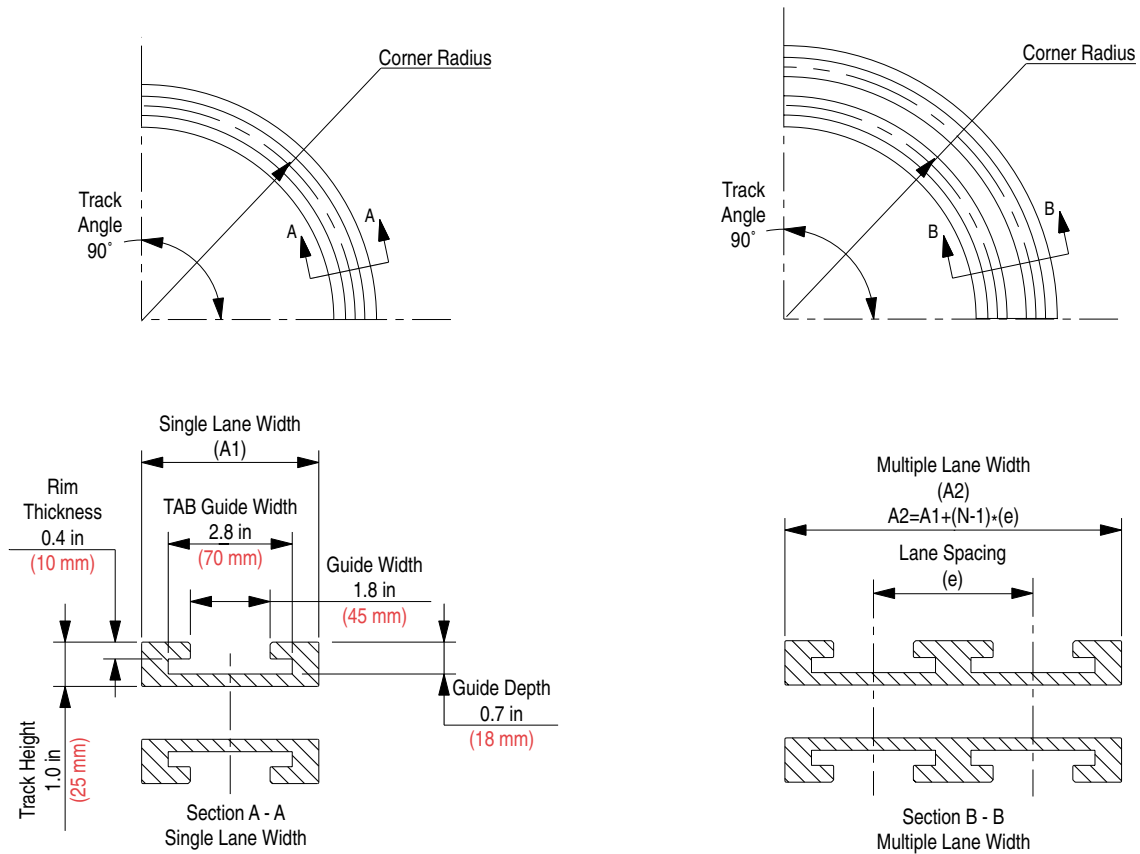


Corner track number supplied as one 90° inside and one 90° outside track, which can be used as either carry or return.

All one piece corner tracks are available on a made-to-order basis.

For 879 TAB chain only. Do not use with 879 (bevel) chains.

Corner Track Number	Chain Width		Corner Radius		Single Lane Width (A1)		Multiple Lane Width (A2)		Lane Spacing (e)		Material	Color	Number of Lanes (N)	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm				lbs	kg
KTU013457-1	3-1/4	82.6	18.0	457	3.9	100	-	-	3.5	90	UHMWPE	Black	1	9.15	4.15
KTU013457-2							7.5	190					2	17.37	7.88
KTU013457-3							11.0	280					3	25.59	11.61
KTU013457-4							14.6	370					4	33.84	15.35
KTU013610-1	24.0	610	24.0	610	3.9	100	-	-	3.5	90			1	12.20	5.53
KTU013610-2							7.5	190					2	23.16	10.51
KTU013610-3							11.0	280					3	34.12	15.48
KTU013610-4	14.6	370	4	45.12	20.47										
KTU018610-1	4-1/2	114.3	24.0	610	4.9	125	-	-	4.7	120			1	14.93	6.77
KTU018610-2							9.6	245					2	29.85	13.54
KTU018610-3							14.4	365					3	44.47	20.17
KTU018610-4							19.1	485					4	59.11	26.81

Corner Track (Two Piece)

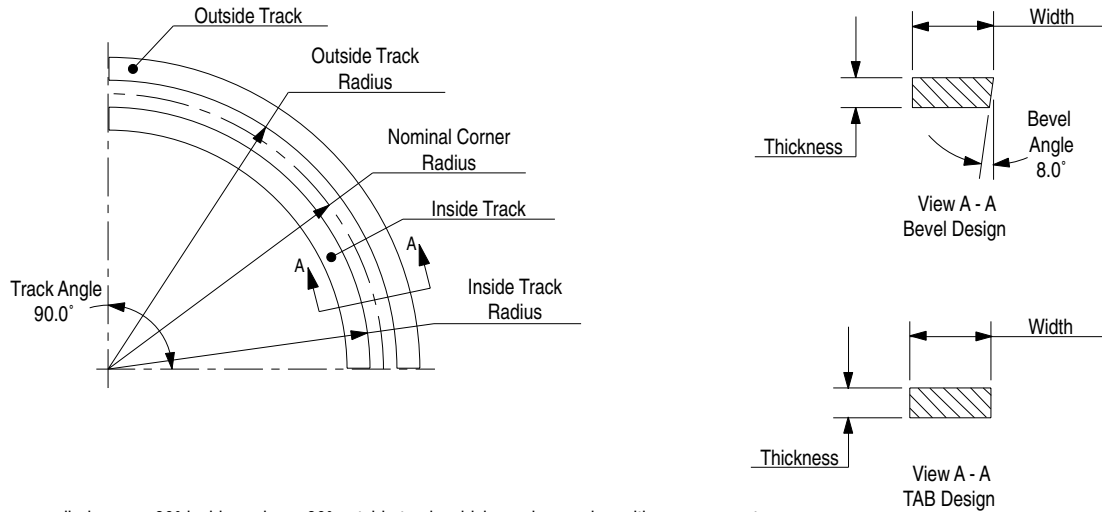


Corner track number supplied as one 90° inside and one 90° outside track, which can be used as either carry or return.

Corner Track Number	Accommodates Top Plate Width		Nominal Corner Radius		Inside Track Radius		Outside Track Radius		Thickness		Width		Material	Color	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			lbs	kg
Bevel Design																
N18B3	3-1/4	82.6	18.0	457	17.2	437	18.8	478	0.4	9	1.0	25	Nylatron®	Black	0.85	0.39
N24B3	All	All	24.0	610	23.2	589	24.8	630	0.4	9	1.0	25	Nylatron®	Black	1.14	0.52
U18B3	3-1/4	82.6	18.0	457	17.2	437	18.8	478	0.4	9	1.0	25	UHMWPE	White	0.85	0.39
U24B3	All	All	24.0	610	23.2	589	24.8	630	0.4	9	1.0	25	UHMWPE	White	1.14	0.52
TAB Design																
N18R3	3-1/4	82.6	18.0	457	17.1	435	18.9	480	0.4	9	1.5	38	Nylatron®	Black	1.28	0.58
N24R3	All	All	24.0	610	23.1	587	24.9	632	0.4	9	1.5	38	Nylatron®	Black	1.71	0.78
U18R3	3-1/4	82.6	18.0	457	17.1	435	18.9	480	0.4	9	1.5	38	UHMWPE	White	1.28	0.58
U24R3	All	All	24.0	610	23.1	587	24.9	632	0.4	9	1.5	38	UHMWPE	White	1.71	0.78

Nylatron is a registered trademark of Polymer Corporation.

Corner Track (Four Piece)

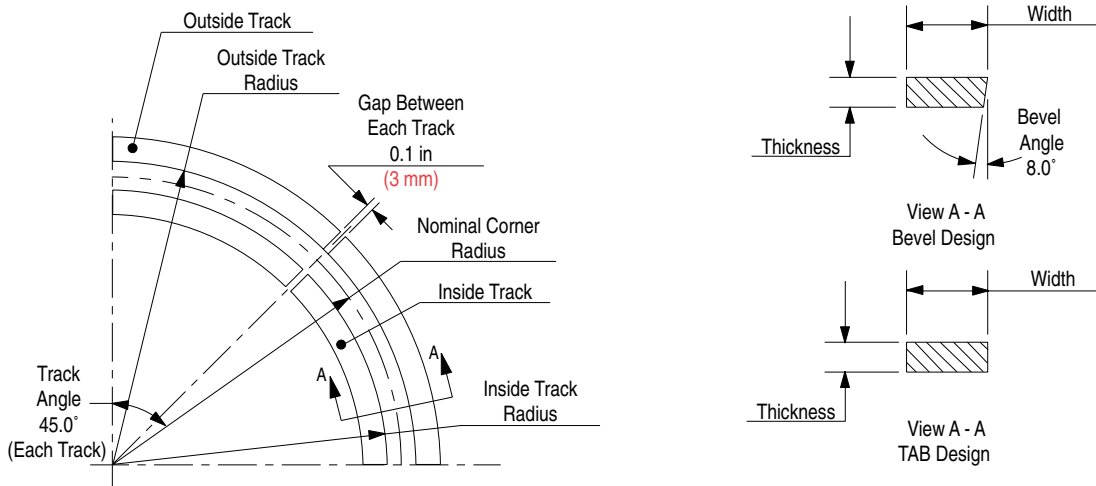

30 in (762 mm) radius furnished in two 45° segments to make one 90° unit.

Corner track number supplied as two 45° inside tracks and two 45° outside tracks, which can be used as either carry or return.

Corner Track Number	Accommodates Top Plate Width		Nominal Corner Radius		Inside Track Radius		Outside Track Radius		Thickness		Width		Material	Color	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			lbs	kg
Bevel Design																
N30B3	All	All	30.0	762	29.2	741	30.8	783	0.4	9	1.5	38	Nylatron®	Black	2.13	0.97
U30B3	All	All	30.0	762	29.2	741	30.8	783	0.4	9	1.5	38	UHMWPE	White	2.13	0.97
TAB Design																
N30R3	All	All	30.0	762	29.2	741	30.8	783	0.4	9	1.5	38	Nylatron®	Black	2.13	0.97
U30R3	All	All	30.0	762	29.2	741	30.8	783	0.4	9	1.5	38	UHMWPE	White	2.13	0.97

Nylatron is a registered trademark of Polymer Corporation.