


882 Semi-Steel Sprocket Information																			
Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	4.386	111.40	4.43	112.5	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	3.75	1.70
10	10	4.854	123.29	4.92	125.0	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	4.19	1.90
11	11	5.325	135.26	5.41	137.4	3/4	1-1/2	20	40	-	-	-	-	3/4	2-1/4	20	55	4.41	2.00
12	12	5.796	147.22	5.90	149.9	3/4	1-3/8	20	35	-	-	-	-	3/4	2-1/4	20	55	4.63	2.10
15	15	7.215	183.26	7.36	186.9	3/4	1-3/4	20	45	-	-	-	-	3/4	2-3/4	20	65	6.24	2.83

Shaft-ready round bores are shipped with keyway and setscrews. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews.

NS882 Thermoplastic Split Sprocket Information																			
Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.325	135.26	5.41	137.4	1	1-3/4	25	45	-	-	-	-	1	1-3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.90	149.9	1	1-3/8	25	35	-	-	-	-	1	1-3/4	25	45	0.82	0.37

Shaft-ready round bores are shipped with keyway and setscrews. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

Corner Track (One Piece)

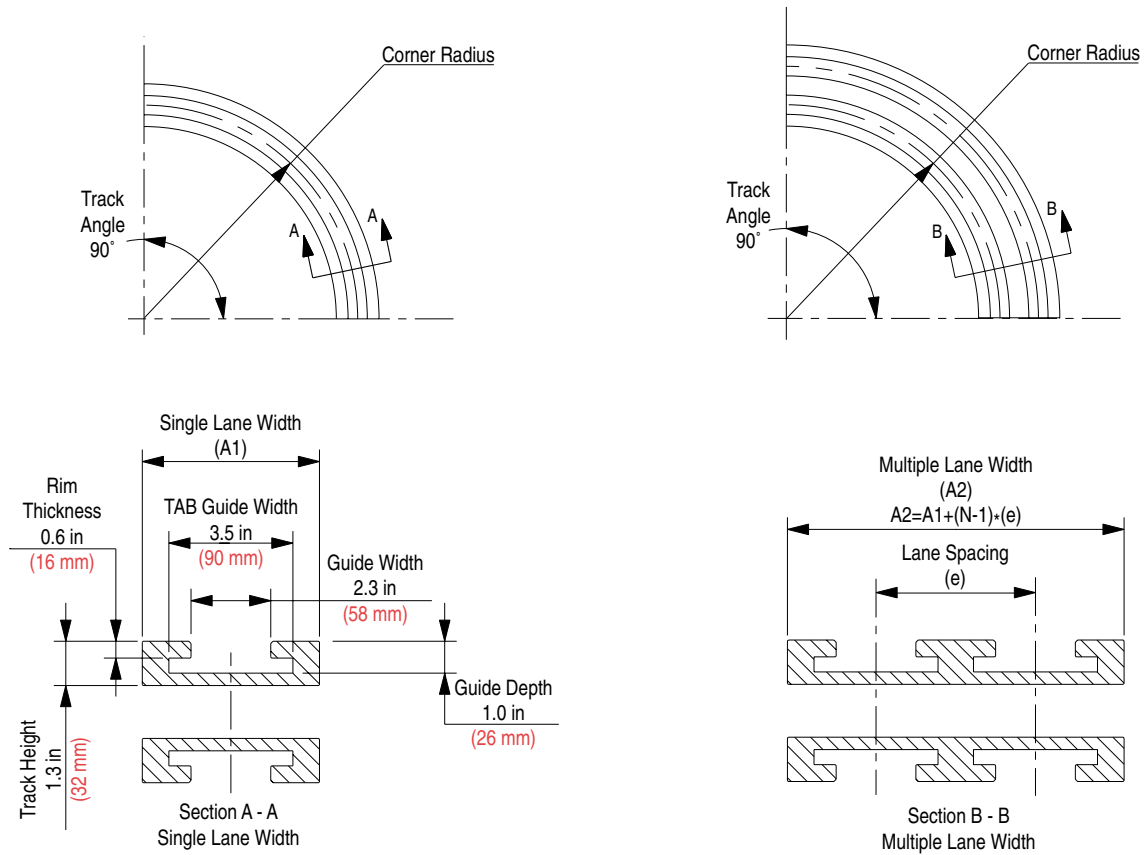


Corner track number supplied as one 90° inside and one 90° outside track, which can be used as either carry or return.

All one piece corner tracks are available on a made-to-order basis.

For LBP 883 TAB chain only.

Corner Track Number	Chain Width		Corner Radius		Single Lane Width (A1)		Multiple Lane Width (A2)		Lane Spacing (e)		Material	Color	Number of Lanes (N)	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm				lbs	kg
KTU218610-1	4-1/2	114.3	24.0	610	4.9	125	-	-	4.7	120	UHMWPE	Black	1	19.59	8.89
KTU218610-2							9.6	245					2	38.42	17.43
KTU218610-3							14.4	365					3	57.21	25.95
KTU218610-4							19.1	485					4	76.00	34.47
KTU230610-1	7-1/2	190.5			7.9	200	-	-	7.7	195			1	31.33	14.21
KTU230610-2							15.6	395					2	61.91	28.08

Corner Track (Two Piece)

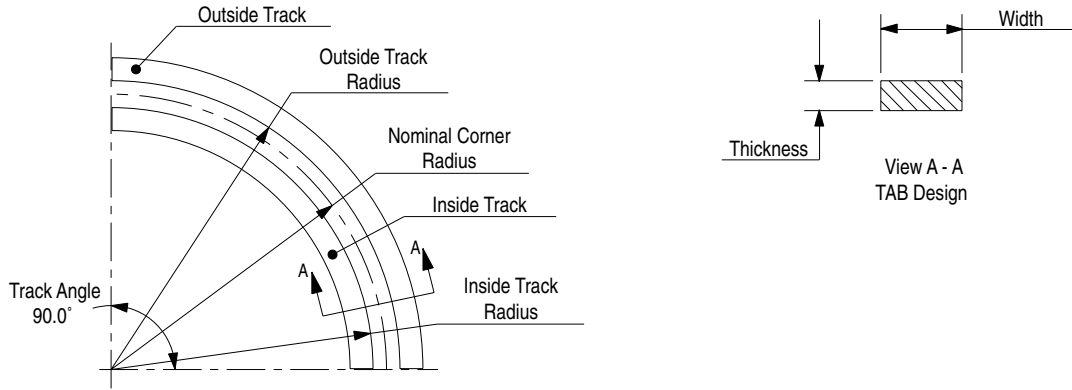


Corner track number supplied as one 90° inside and one 90° outside track, which can be used as either carry or return.

Corner Track Number	Accommodates Top Plate Width		Nominal Corner Radius		Inside Track Radius		Outside Track Radius		Thickness		Width		Material	Color	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			lbs	kg
TAB Design																
N24R5	All	All	24.0	610	22.9	581	25.1	639	0.6	16	1.5	38	Nylatron®	Black	2.89	1.31

Nylatron is a registered trademark of Polymer Corporation.

Corner Track (Four Piece)

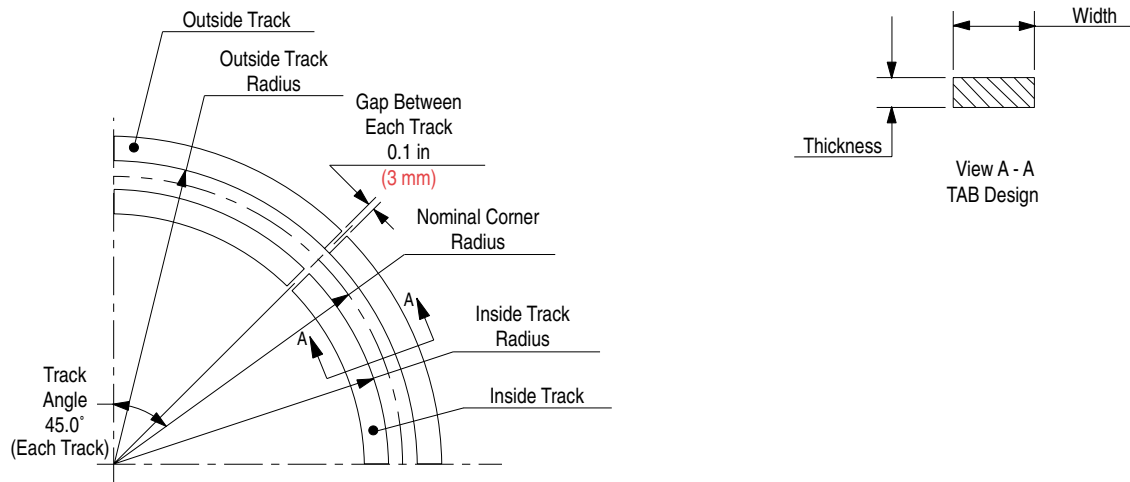

30 in (762 mm) radius furnished in two 45° segments to make one 90° unit.

Corner track number supplied as two 45° inside tracks and two 45° outside tracks, which can be used as either carry or return.

Corner Track Number	Accommodates Top Plate Width		Nominal Corner Radius		Inside Track Radius		Outside Track Radius		Thickness		Width		Material	Color	Approximate Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			lbs	kg
TAB Design																
N30R5	All	All	30.0	762	28.9	733	31.1	791	0.6	16	1.5	38	Nylatron®	Black	3.61	1.64

Nylatron is a registered trademark of Polymer Corporation.